

JD 調速閥



調速閥規格


使用介質		空 氣
最高使用壓力		1.0MPa (10.2kgf/cm ²)
使用真空壓力		-100 kPa (10Torr)
耐壓試驗壓力		3.0MPa (30.6kgf/cm ²)
環境及介質溫度		-5 ~ 60°C
螺 紋	安 裝 部	JIS B0203(管用圓錐螺紋)
		JIS B0209 , 2級 (公制普通螺紋)
	螺 母 部	JIS B0211 , 2級 (公制細牙螺紋)
螺紋部分的密封		帶有密封劑 , 或密封墊片

成品訂購表示

JDN	04	02
調速閥種類	配管外徑	螺紋外徑或配管外徑
JD : 快速型	4 : 4mm	螺紋外徑 配管外徑
JDN : 飛速型	6 : 6mm	M5 : M5x0.8 A04 : Ø 4
	8 : 8mm	01: Rc1/8 A06 : Ø 6
	10 : 10mm	02: Rc1/4 A08 : Ø 8
	12 : 12mm	03: Rc3/8 A10 : Ø 10
		04: Rc1/2 A12 : Ø 12

■ JD系列 快速型調速閥

● JDSCA 標準型調速閥



型號	規格
JDSCA04M5	4mm-M5
JDSCA0401	4mm-1/8"
JDSCA0402	4mm-1/4"
JDSCA06M5	6mm-M5
JDSCA0601	6mm-1/8"
JDSCA0602	6mm-1/4"
JDSCA0603	6mm-3/8"
JDSCA0604	6mm-1/2"
JDSCA0801	8mm-1/8"
JDSCA0802	8mm-1/4"


型號	規格
JDSCA0803	8mm-3/8"
JDSCA0804	8mm-1/2"
JDSCA1001	10mm-1/8"
JDSCA1002	10mm-1/4"
JDSCA1003	10mm-3/8"
JDSCA1004	10mm-1/2"
JDSCA1202	12mm-1/4"
JDSCA1203	12mm-3/8"
JDSCA1204	12mm-1/2"

空氣
調理組氣壓
閥類執行
元件氣壓
接頭

傳感器

輔助
元件


● JDSC-C 全銅標準型調速閥

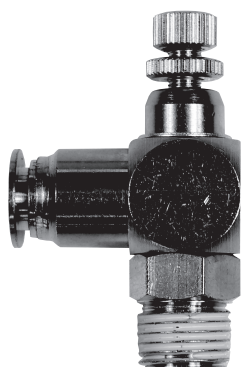

型號	規格
JDSC04M5C	4mm-M5
JDSC0401C	4mm-1/8"
JDSC0402C	4mm-1/4"
JDSC06M5C	6mm-M5
JDSC0601C	6mm-1/8"
JDSC0602C	6mm-1/4"
JDSC0603C	6mm-3/8"
JDSC0604C	6mm-1/2"
JDSC0801C	8mm-1/8"
JDSC0802C	8mm-1/4"

型號	規格
JDSC0803C	8mm-3/8"
JDSC0804C	8mm-1/2"
JDSC1001C	10mm-1/8"
JDSC1002C	10mm-1/4"
JDSC1003C	10mm-3/8"
JDSC1004C	10mm-1/2"
JDSC1202C	12mm-1/4"
JDSC1203C	12mm-3/8"
JDSC1204C	12mm-1/2"

● JDSC-BC 全銅調速閥(入氣調整)

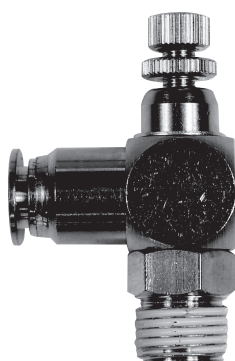


型號	規格
JDSC04M5BC	4mm-M5
JDSC0401BC	4mm-1/8"
JDSC0402BC	4mm-1/4"
JDSC06M5BC	6mm-M5
JDSC0601BC	6mm-1/8"
JDSC0602BC	6mm-1/4"
JDSC0603BC	6mm-3/8"
JDSC0604BC	6mm-1/2"
JDSC0801BC	8mm-1/8"
JDSC0802BC	8mm-1/4"

型號	規格
JDSC0803BC	8mm-3/8"
JDSC0804BC	8mm-1/2"
JDSC1001BC	10mm-1/8"
JDSC1002BC	10mm-1/4"
JDSC1003BC	10mm-3/8"
JDSC1004BC	10mm-1/2"
JDSC1202BC	12mm-1/4"
JDSC1203BC	12mm-3/8"
JDSC1204BC	12mm-1/2"

■ JD系列 快速型調速閥

- JDSCU 雙插U型調速閥



型號	規格
JDSCU04	4mm-4mm
JDSCU06	6mm-6mm
JDSCU08	8mm-8mm
JDSCU10	10mm-10mm
JDSCU12	12mm-12mm

JDF 鋁體調速閥



成品訂購表示

JDF	01
鋁體調速閥	配管規格(RC)
	01 : 1/8" x 1/8"
	02 : 1/4" x 1/4"
	03 : 3/8" x 3/8"
	04 : 1/2" x 1/2"